


TUL580 (L-5S) TIANLI

L-5S

TUL580

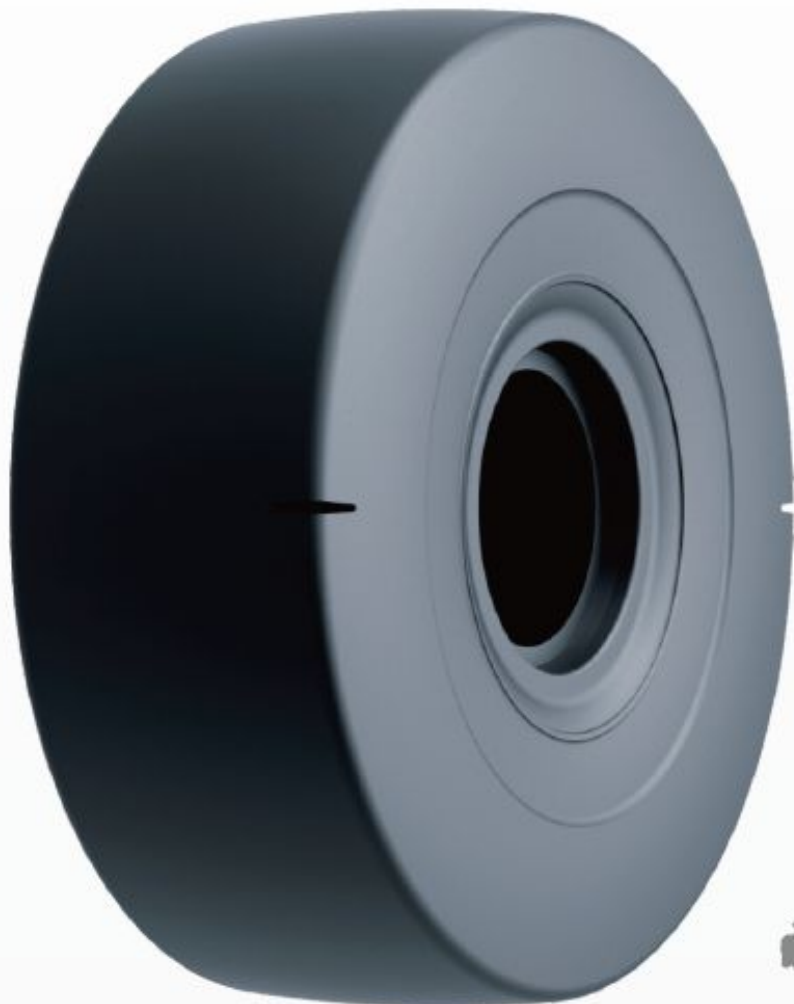

Size	Type	Rim	TRA Code	Load Speed Index	Star Rating	Tread Depth (mm/inch)	Overall Diameter (mm/inch)	Section Width (mm/inch)	Inflation Pressure (KPA/PSI)	Loading Capacity (Kg/lbs)	Speed (Km/mph)
12.00R24	TL	8.50/1.3	L-5S	175/A2	★★	55	1277	328	800	6900	10
						69/32	50.3	12.9	116	15212	6
14.00R24	TL	10.00/1.5	L-5S	186/A2	★★	63.5	1418	372	800	9500	10
						80/32	55.8	14.6	116	20944	6
17.5R25	TL	14.00/1.5	L-5S	182/A2	★★	65	1398	442	650	8500	10
						82/32	55.0	17.4	94	18739	6
18.00R25	TL	13.00/2.5	L-5S	204/A2	★★	82	1677	506	825	16000	10
						103/32	66.0	19.9	120	35273	6
26.5R25	TL	22.00/4.5	L-5S	209/A2	★★	97.5	1760	690	650	18500	10
						123/32	69.3	27.2	94	40785	6
29.5R25	TL	25.00/3.5	L-5S	216/A2	★★	97	1906	770	650	22400	10
						122/32	75.0	30.3	94	49383	6
35/65R33	TL	28.00/3.5	L-5S	224/A2	★★	97	2085	873	650	28000	10
						122/32	82.1	34.4	94	61728	6